


Weight : 66 g

Outline UNIT:mm

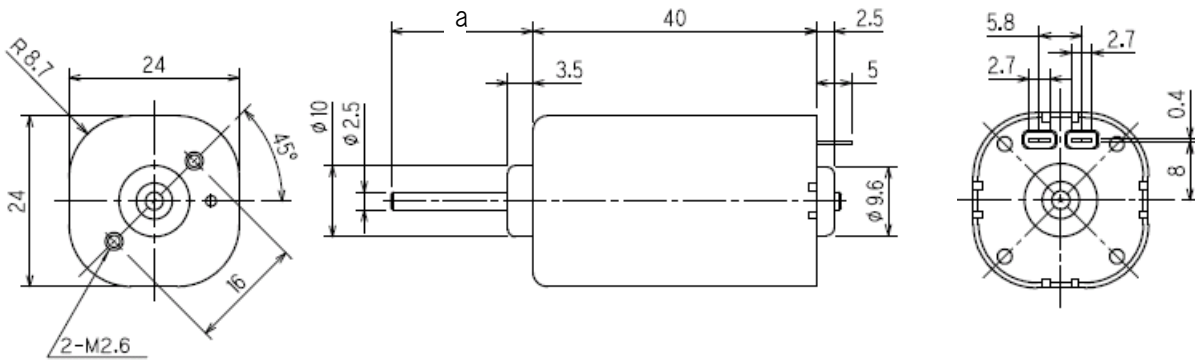


Specifications

Model	Operating Voltage (V)	Rated Voltage (V)	No Load Speed (min^{-1})	No Load Current (mA)	Rated Load		Rated Load Speed (min^{-1})	Rated Load Current (mA)	Starting Torque		Starting Current (mA)	Shaft Length a (mm)		
					($\text{gf}\cdot\text{cm}$)	($\text{mN}\cdot\text{m}$)			($\text{gf}\cdot\text{cm}$)	($\text{mN}\cdot\text{m}$)		15.0	20.0	25.0
SE24P1JTC	20 to 26	24.0	3267	60	264.3	25.900	2327	428	922.4	90.40	1364	15.0	20.0	25.0
SE24P2CTC	20 to 26	24.0	7463	191	204.1	20.000	6565	834	1865.3	182.80	6146	15.0	20.0	25.0

Characteristics

SE24P1JTC

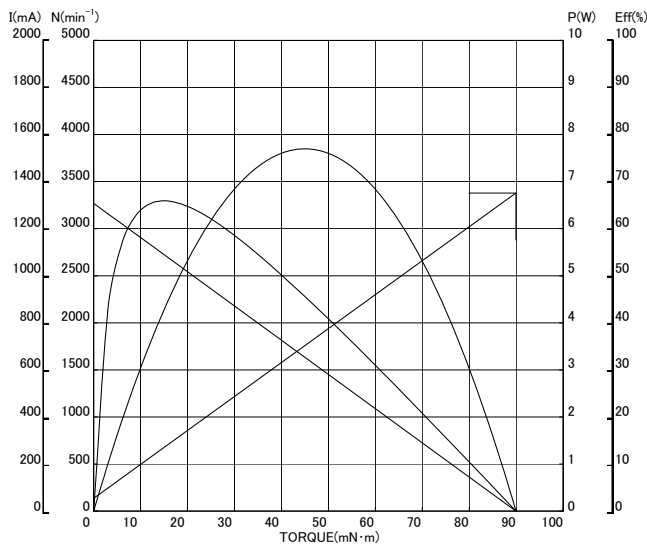

SE24P2CTC

